


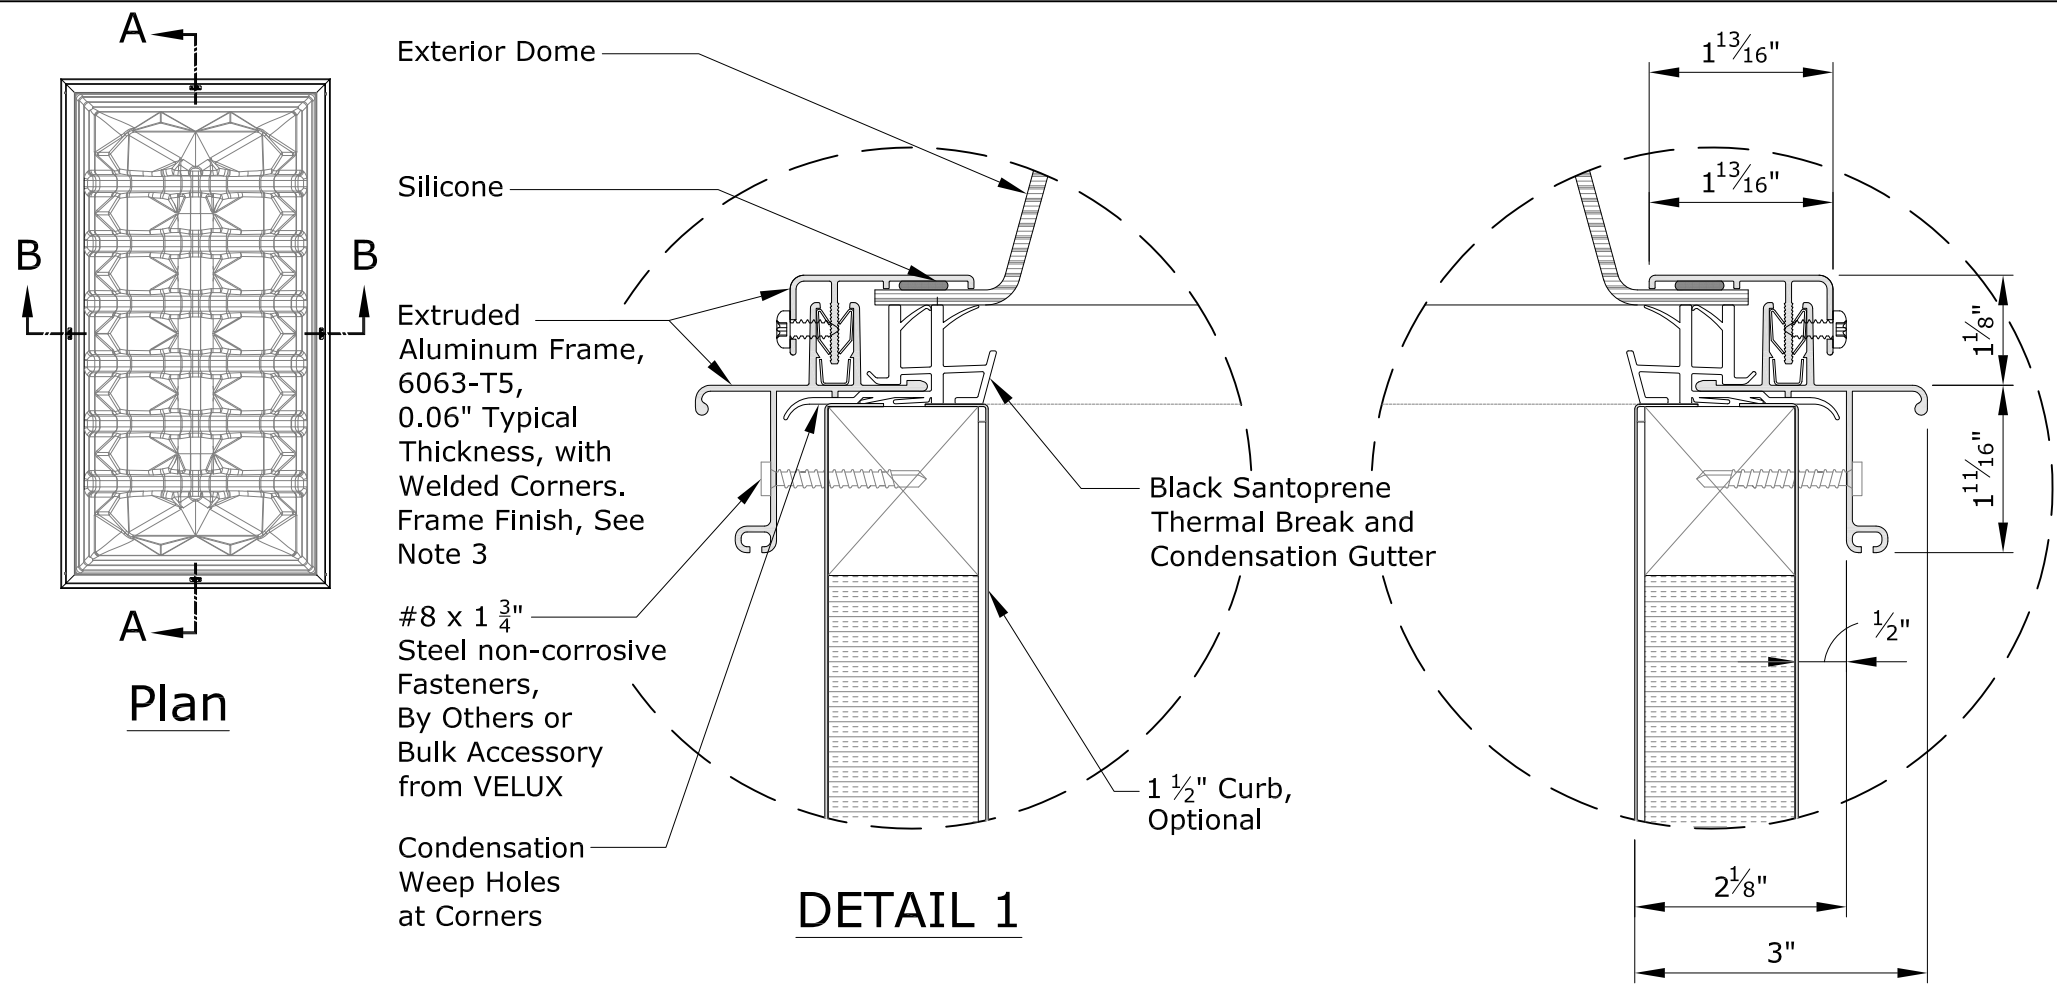


Dynamic Single Dome skylight

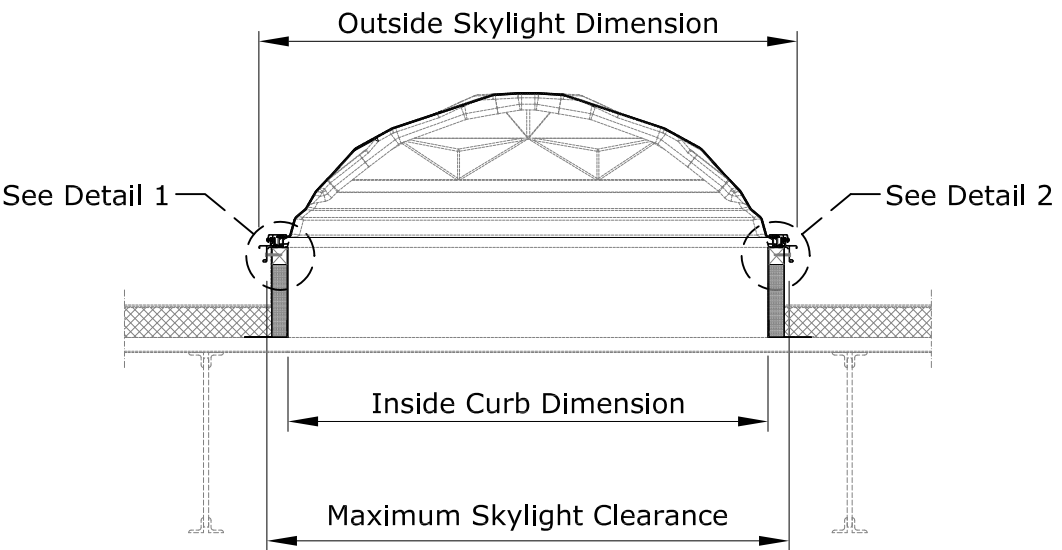

Dome Material	Dome Description and Designation	
LuxGuard 0.150 0.150	White Smooth (4P2) Clear Smooth (4P1)	Sizes larger than 4x8
LuxGuard 0.118 0.118	White Smooth (3P2) Clear Smooth (3P1)	Max size 4x8


Size	Inside Curb Dimension	Maximum Skylight Clearance Dimension	Outside Skylight Dimension
2'	24"	28 1/4"	29 7/8"
3'	36"	40 1/4"	41 7/8"
4'	48"	52 1/4"	53 7/8"
5'	60"	64 1/4"	65 7/8"
6'	72"	76 1/4"	77 7/8"
8'	96"	100 1/4"	101 7/8"
10'	120"	124 1/4"	125 7/8"

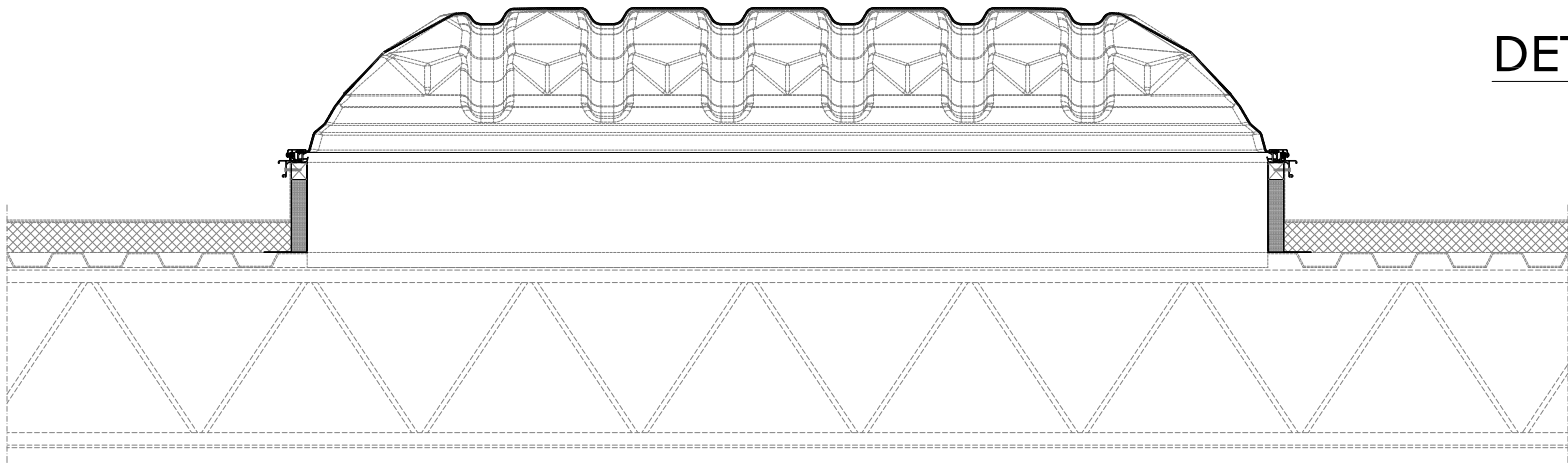

GENERAL NOTES

1. This drawing emphasizes the VELUX CD1/CE1 Dynamic Dome Skylight. It illustrates a general arrangement layout (plus recommendations) for a VELUX CD1/CE1 installation in a 0-60 degree roof pitch application. The CD1/CE1 skylight installs directly on site built or prefabricated curbs.
2. The architectural/structural design and specifications for the inclusion of a commercial skylight, such as the VELUX CD1/CE1, in any roofing/ceiling application is determined and provided by others. The design criteria includes, but is not limited to design loads, structural configurations, structural framing member sizes and material, architectural finishes and integration with the roofing/ceiling systems of the building. VELUX recommends compliance by all designers and installers with all local and industry specific building codes and guidelines. VELUX assumes no responsibility or liability in the design, construction and performance of a building structure by others.
3. Model CD1 Frame is mill finish. Model CE1 Frame is powder coated neutral gray.

This drawing is an instrument of service and is provided for informational use only.



Sky-Global Product Management

VELUX
1418 Evans Pond Road
Greenwood, SC 29649
1-800-88-VELUX
www.VELUXUSA.com

Dynamic Single Dome Skylight