

Horizon V-Series

Translucent wall system

LumiWall 40 – translucent 40mm multiwall polycarbonate wall panel system




Features:


- Lightweight interlocking wall panel system with large span capabilities
- Superior U-value, light transmission, SHGC, impact resistance¹
- Dry glaze system – no sealants required on panels
- Thermally broken aluminum frame
- Unlimited height and width
- Easily installed by commercial contractors
- Panels are coextruded with a layer of UV inhibitor
- Maintain its shape, color, and strength
- Requires no maintenance, 10 Year Warranty
- NFRC Certified (CPD# WPC-A-12)

Design:

- Lightweight, interlocking 40mm tongue and groove multiwall polycarbonate panels
- System depth: 2¾" panel frame, 4" subsill
- Standard subsill for trouble free installation
- Sloped sill nose with recessed weeps for maximum drainage
- Extruded aluminum frame with polyurethane thermal breaks for improved thermal performance
- Two separate assembly points create a tight attractive corner
- Factory finishes meeting all AAMA finish standards
- No exposed fasteners
- Available with a wide range of color choices.²

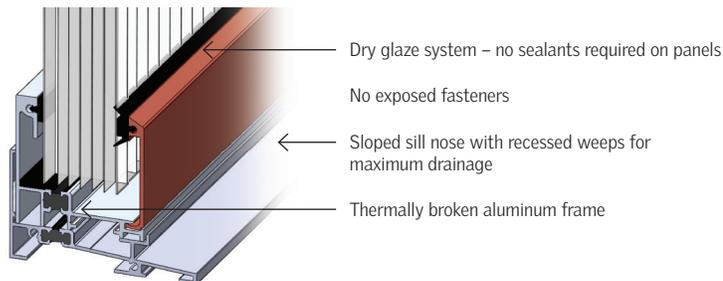

University of Houston Indoor Football Practice Facility, Houston, TX

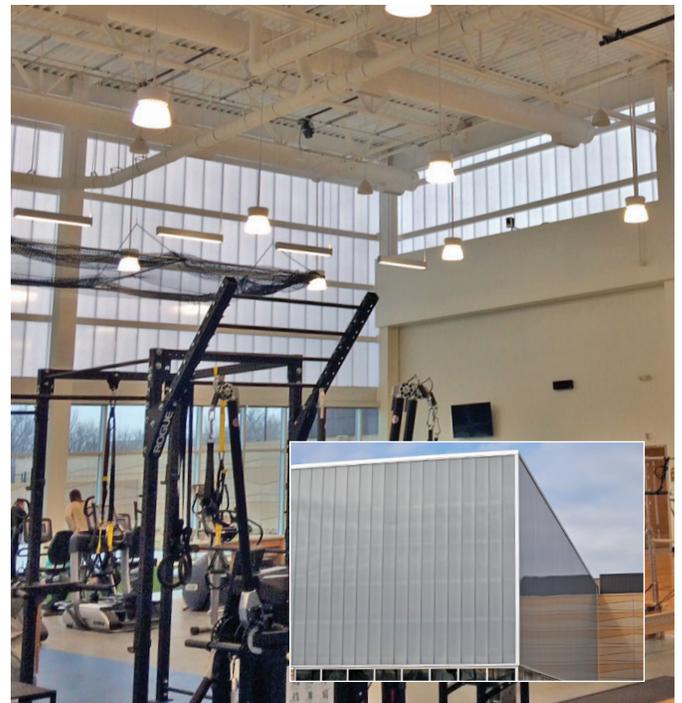

Sport Medicine Center, Children's Mercy, Kansas City, MO

¹ Compared to fiberglass panels. ² Clear, Opal and Opal IR are stocked. Other glazing options available.